



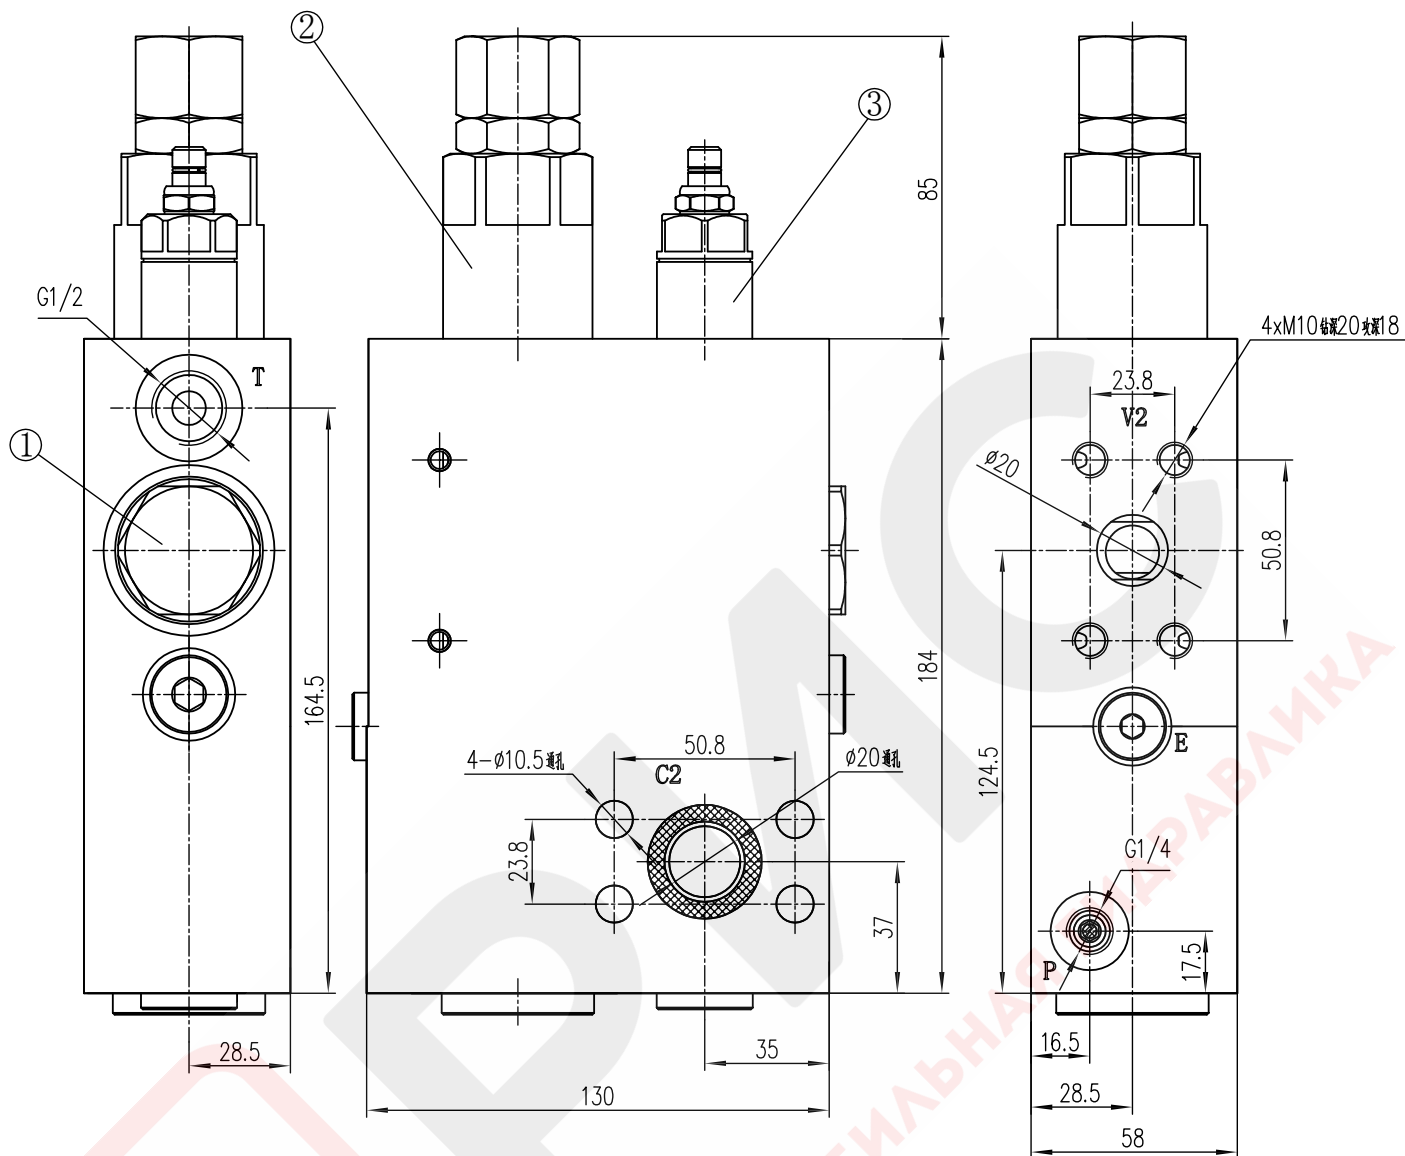

Hydraulic schematic

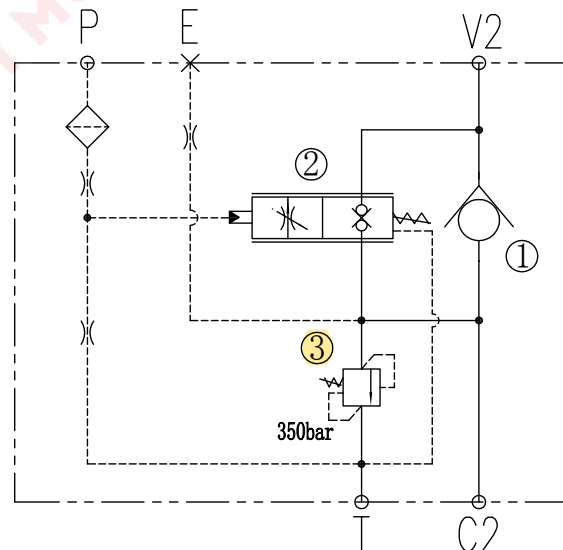

Technical parameters:

1. Maximum working pressure: 350 bar;
2. Maximum flow rate from V2 to C2: 350L/min
Maximum flow rate from C2 to V2: 200L/min;
3. Balance valve 2 pressure setting at 7+1/0 bar,
control Pressure range: 7~25 bar;
4. Relief valve 3 pressure setting: 350 bar;
5. Ports P and E are G1/4, and port T is G1/2
C2/V2 are 3/4 SAE 6000;
6. Working temperature range: -40 ℃~+80 ℃

标记	数量	更改文件号	签字	日期
设计			标准化	
审核				
工艺			日期	

二	三	重量	比例
			1:1.5
共	页	第	页