02P40-1K16A1 GV1

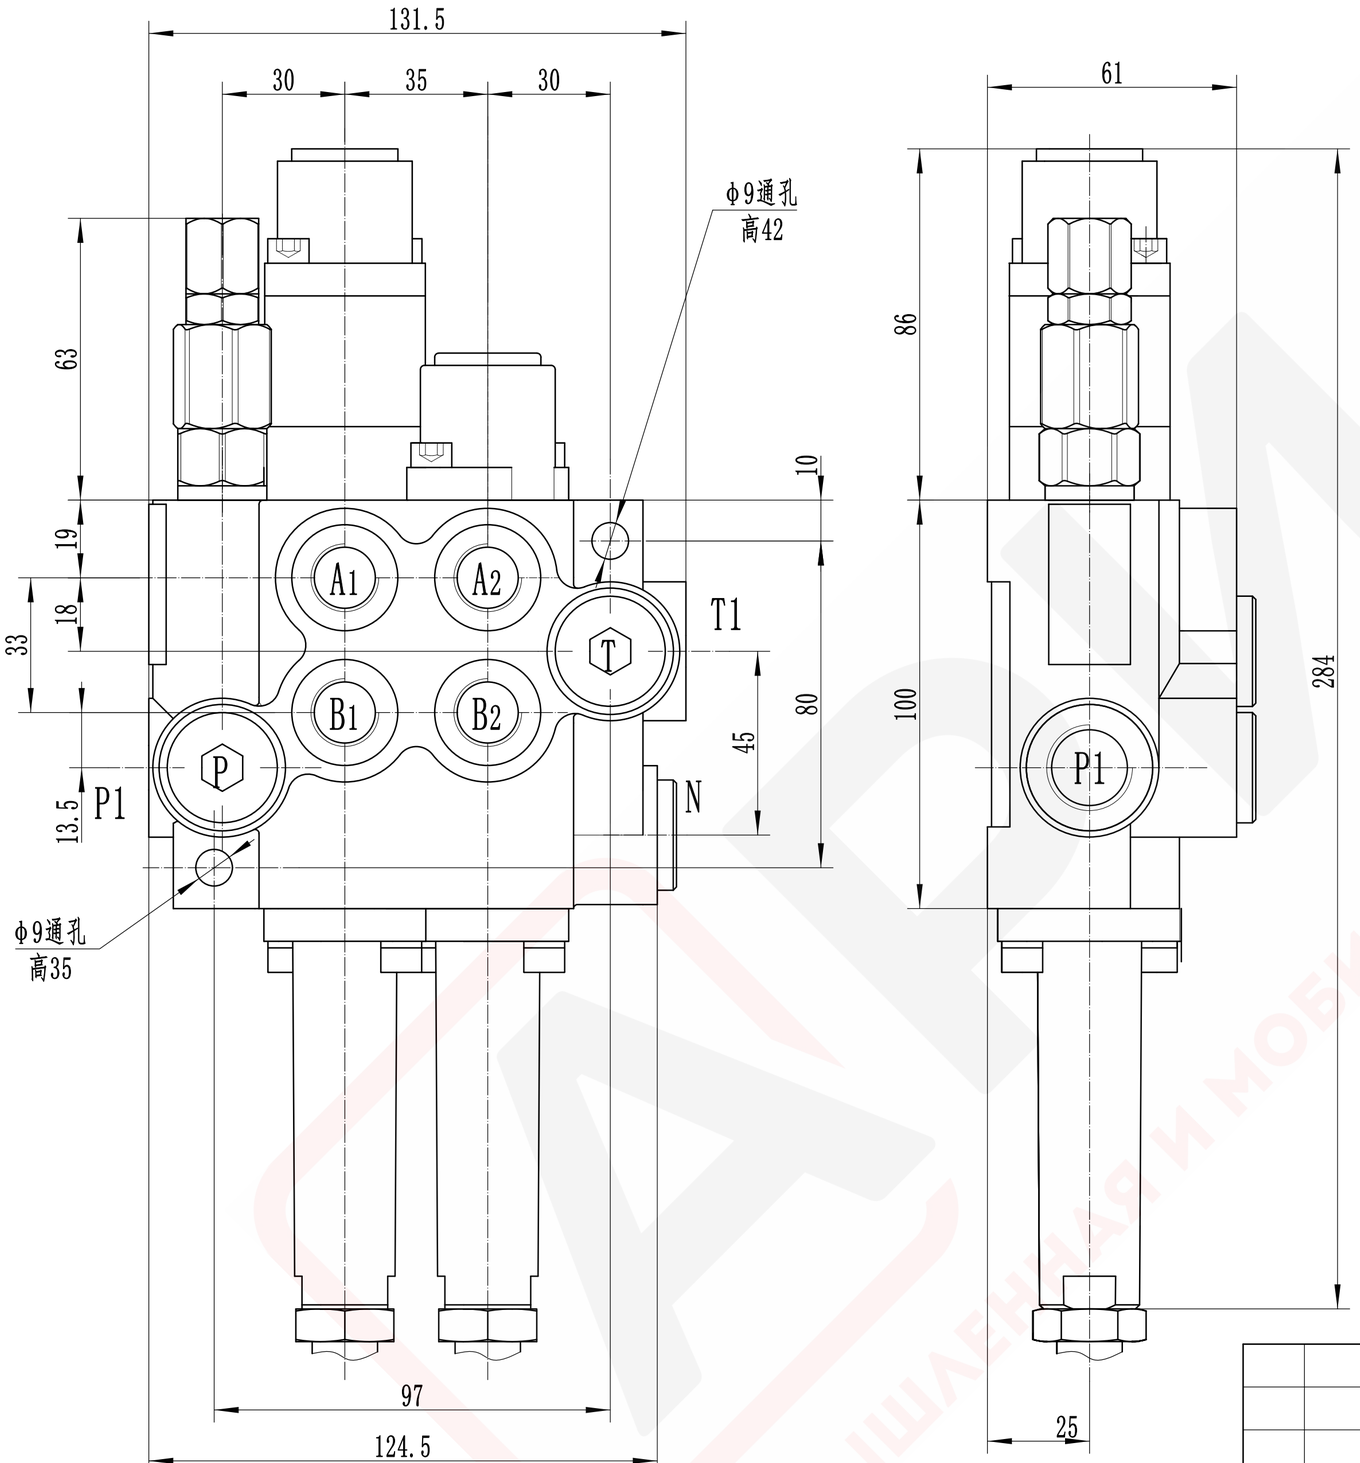

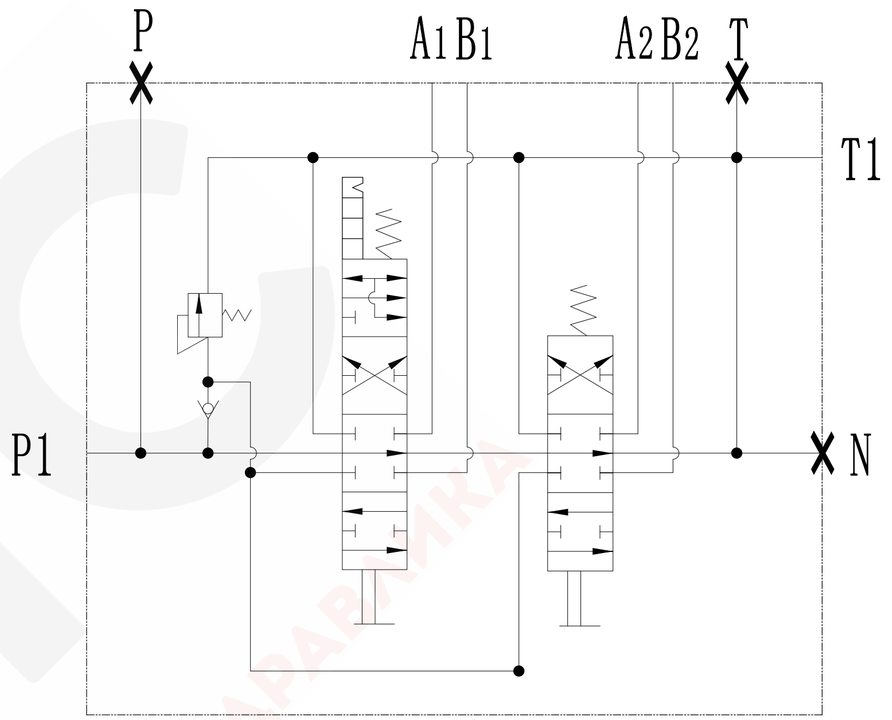

阀体	
接口	螺纹规格
P-P1	G1/2
T-T1	G1/2
A1-A2	G3/8
B1-B2	G3/8
N	G1/2

Technical requirements:

1. Rated flow :40L/min, maximum flow :55L/min;
2. Maximum working pressure :25MPa;
3. Setting pressure of safety valve :18MPa;
4. Each movement part must be flexible, no stuck phenomenon;
5. Oil port size :P, T, N oil port are G1/2, Oil ports A and B are G3/8.
6. Valve body surface phosphating, safety valve and plug galvanized,the back cover of the support is aluminum.

借（通）用件登记
旧底图总号
底图总号
签字
日期
档案员 / 日期

标记	处数	分区	更改文件号	签名	年、月、日
设计			标准化		
校对					
审核					
工艺			批准		

版本号	类型
阶段标记	重量	比例
		1:1.5
共 1 张	第 1 张	

АРИС
ПРОМЫШЛЕННАЯ И МОБИЛЬНАЯ ГИДРАВЛИКА

02P40-1K16A1 GV1

ПРОМЫШЛЕННАЯ И МОБИЛЬНАЯ ГИДРАВЛИКА